


## AsbestoCure

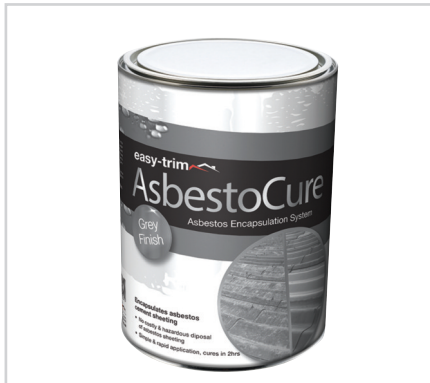

# easy-trim<sup>®</sup> WaterProofing

### Description

AsbestoCure is a liquid applied moisture tolerant synthetic polymer coating which dries to form a tough seamless membrane. Designed specifically for asbestos encapsulation. A 10 year guarantee is offered depending on the coverage rate used.

### Benefits

- Simple & rapid application
- No costly and hazardous disposal of asbestos cement sheets
- Overcoat from 2 hours in ventilated conditions
- Tins can be opened and re-sealed with no surface skinning inside the tin
- AsbestoCure can offer a tax break allowing up to 150% of the cost to be offset against pre-tax profits
- UV Stable
- Can be applied by brush, roller or spray

### Application

**Substrate Preparation:** Specialist cleaning and filtration systems are available via our approved installers that meets the HSE's requirements. Specialist cleaning is required on asbestos cement sheets not previously sealed. Loose fixings should be secured and damaged sheets repaired with the Easy-Trim 225 GRF matting (150 mm width) or replaced with same profile cement sheets prior to coating. For non-specialist substrate preparation and cleaning, clean surfaces with water. If extra cleaning is required to remove oil or grease, use an ordinary household detergent. Ensure all detergent is thoroughly rinsed off before applying any coatings. Any metal surface should be free of loose rust and mill scale, cleaned and degreased with surface cleaner.

**Priming:** No priming is usually required.

**Bolt Heads and Small Repairs:** Tighten and crop all bolt heads to 25mm. Remove all rust and coat with AsbestoCure within 24 hours. Clean and prepare cracked boards then apply AsbestoCure at a coverage rate of 0.6L/m<sup>2</sup>, allowing a 100mm border around the edges of the repair. Into this bed the Easy-Trim GFR 225 matting (150mm roll width available) and pull through the AsbestoCure with a roller or brush on the surface. Add a further 0.4L/m<sup>2</sup> whilst still wet to fully encapsulate the matting.

**Application:** Apply the AsbestoCure system over the whole roof area including the coated bolt heads and repairs. Apply using airless spray or brush. Normal drying time is 2-4 hours. The product must not be applied in wet or freezing conditions or if these conditions are likely to occur before the membrane has dried. The product is applied in a single coat. Clean tools using tool cleaner.

Tel: +44 (0) 845 034 6008

e: enquiries@easy-trim.co.uk

f: +44 (0) 845 034 6010

Unit 12B Metcalf Drive  
Altham Industrial Estate | Altham  
Lancashire | BB5 5TU | England

w: www.easy-trim.co.uk

find us:



## AsbestoCure

### Application - Continued

Coverage Rates: 0.6L/m<sup>2</sup>

Colours: AsbestoCure is available in Medium Grey. RAL colour matching available - subject to minimum order quantities.

Storage: Store in dry, cool conditions, preferably at temperatures between 10°C and 20°C.

Temperature: Coverage rates can vary with temperature. Avoid storing in cold conditions prior to application.

Site Testing: The above coverage rates are for guidance only. Site application tests are recommended to confirm actual coverage rates.

### Guarantee

A 10 year Guarantee is provided with this system.

### Components

AsbestoCure - 5L & 15L Units.

Easy-Trim 225 GFR Matting - 150mm x20m or 250mm x 20m.

### Durability

AsbestoCure is applied in a single coat for visual quality assurance. It is immediately UV stable and impervious to water, and when subjected to normal service conditions, will provide an effective barrier to the transmission of liquid water and water vapour for the design life of the structure to which it is applied.

### Typical Physical Performance Data

Form	Coloured Liquid
Pack Size	5 L and 15 L
Shelf Life	12 Months
Application Temperature Limits	5 to 40°C (Deck Temperature)
Curing Time	1 to 2 hours
Overcoat Time	1 to 2 hours

For further information please refer to MSDS (Material Safety Data Sheet). For specific advice on chemical resistance and further installation guidance please contact Easy Trim technical department.

### Disclaimer

The information relates only to this specified material and may not be valid for such materials used in combinations with other materials and processes. This information is, to the best of the Company's knowledge and belief, accurate and reliable as of the date indicated. However, no warranty, guarantee or representation is made to its accuracy, reliability or completeness. It is the user's responsibility to satisfy themselves as to the suitability of the information on the material for their own particular use.

Tel: +44 (0) 845 034 6008

e: enquiries@easy-trim.co.uk

f: +44 (0) 845 034 6010

Unit 12B Metcalf Drive  
Altham Industrial Estate | Altham  
Lancashire | BB5 5TU | England

w: www.easy-trim.co.uk

find us:

