
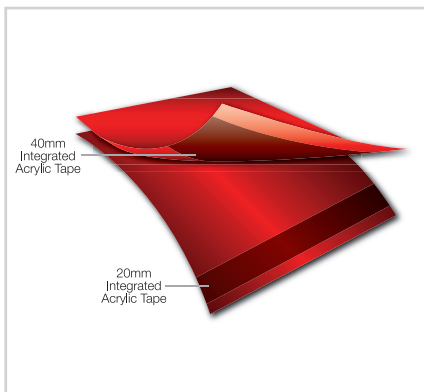


## Overlapping Tape

# easy-trim<sup>®</sup> Breather Membranes

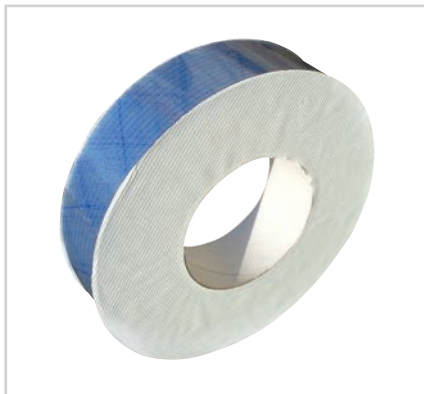

SP38 Tape on membrane sample

NOTE: This information is given in good faith being based on the latest knowledge available to Easy-Trim Roofing & Construction Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice. Responsibility cannot be accepted for the application of products, and no claims can be considered, where the manufacturer's instructions have not been followed. The user should not assume; based on any information provided in this sheet, that the product is suitable for any abnormal use. All products are sold subject to our standard conditions of sale, available on request.

### Description

Hot-melt based, pressure sensitive adhesive tapes integrated to Easy-Trim Breather Membrane products.

- They create air tight and rainproof sealing of over-laps.
- They accelerate installation process and create "TAPE TO TAPE" joints.
- They improve sealing properties of overlaps in comparison to one-tape overlap sealing.
- Better adhesion of tapes, comparing to one-tape overlap sealing, especially in temperatures lower than +5°C. It makes installation in low temperatures quite easy.
- Due to wider width of release liner, the risk of joint contamination by dust and soot is minimized.

### Installation

- Place underlay to correct position. Start removing both lines altogether from top and bottom part, check that bottom and top underlay is in correct position and join overlaps of underlay. Slightly press join to ensure good sealing.

### Performance & Properties

Adhesive	Hot melt pressure sensitive
Release liner	PET film
Width glue part	On top 80 mm On bottom 45 mm
Width release liner	On top 100 mm On bottom 60 mm
Length	38mm x 50m
Temperature range	-30°C +80°C
Application temperature	+1°C +40°C
Water column of join	250cm
Shear strength	170 N
Peel strength	30 N
Storability	1 year
Storage temperature	Stable between -40°C and +80°C

Tel: +44 (0) 845 034 6008

e: enquiries@easy-trim.co.uk

f: +44 (0) 845 034 6010

Unit 12B Metcalf Drive  
 Altham Industrial Estate | Altham  
 Lancashire | BB5 5TU | England

w: www.easy-trim.co.uk

find us:

